



Specifications


Type		C500Q					
Dimensions (L x W x H)	mm	88 x 88 x 71.5					
Weight	kg	1.8					
Capacitance ($\pm 10\%$)	μF	4.5 μF	7 μF	9 μF	13 μF	21 μF	33 μF
Sinusoidal Voltage	V_{rms}	1000	800		700	500	
Peak_Voltage	V	1410	1130		990	710	
Max. Current	A_{rms}	800	1000				
Max. Power	kVA_r	500					
Freq Range @ Half Power	kHz	9-91	7-71	5-49	4-30	5-19	

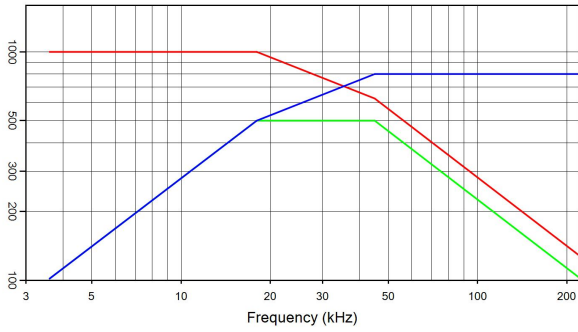


C500Q 4.5 µF 1000 V_{rms} 800 A_{rms} 500 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

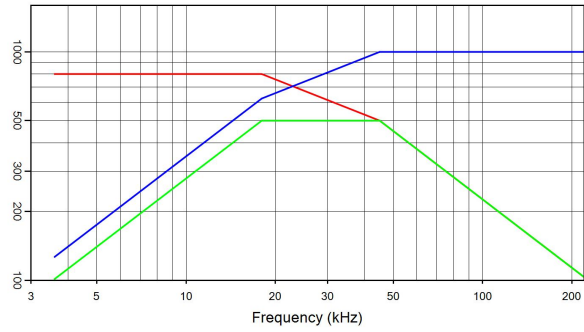


C500Q 7 µF 800 V_{rms} 1000 A_{rms} 500 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

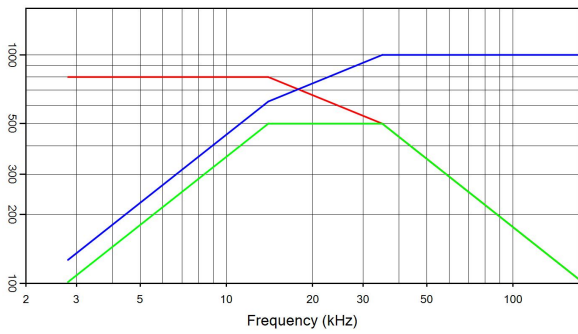


C500Q 9 µF 800 V_{rms} 1000 A_{rms} 500 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

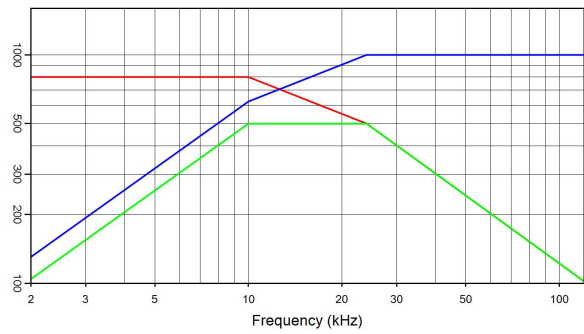

C500Q 13 µF 800 V_{rms} 1000 A_{rms} 500 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

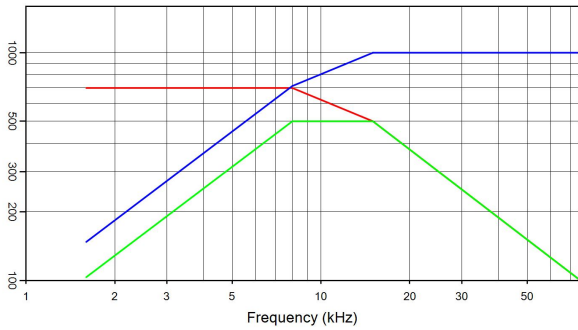

C500Q 21 µF 700 V_{rms} 1000 A_{rms} 500 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —

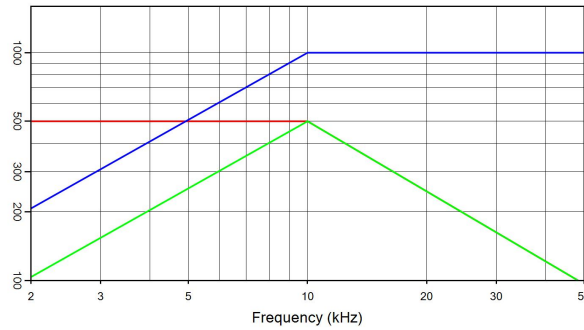

C500Q 33 µF 500 V_{rms} 1000 A_{rms} 500 kVA_r
 I(A) — Q(kVA_r) — V_{rms} —