


This polypropylene capacitor has same dimensions as the mica CP80/200 and has internal structure which makes it ideal for ultra-high frequencies.

It is available in high temperature version with pps elements.


It can be ordered with a standard or with a UL resin.

## Specifications


Type		CMPP					
Dimensions (L x W x H)	mm	70 x 50 x 18.2					
Weight	kg	0.35					
Capacitance (±10%)	μF	0.025 <sub>μF</sub>	0.05 <sub>μF</sub>	0.1 <sub>μF</sub>	0.2 <sub>μF</sub>	0.5 <sub>μF</sub>	1 <sub>μF</sub>
Sinusoidal Voltage	V <sub>rms</sub>	1100		1000	700		600
Peak_Voltage	V	1556	1556	1414	990		849
Max. Current	A <sub>rms</sub>	200		300	350	400	
Max. Power	kVA <sub>r</sub>	200					
Freq Range @ Full Power	kHz	1053-1274	526-637	318-717	325-488	130-255	88-127

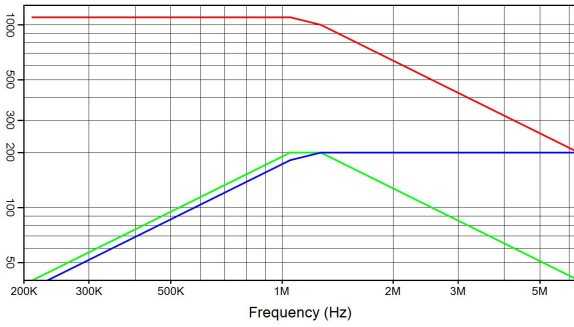


**CMPP 0.025  $\mu\text{F}$  1100 V<sub>rms</sub> 200 A<sub>rms</sub> 200 kVA<sub>r</sub>**  
 I(A) — Q(kVA<sub>r</sub>) — V<sub>rms</sub> —

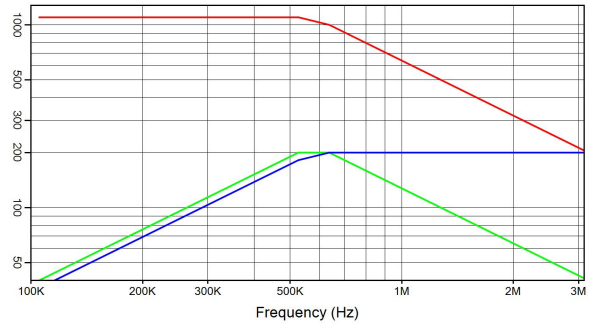


**CMPP 0.05  $\mu\text{F}$  1100 V<sub>rms</sub> 200 A<sub>rms</sub> 200 kVA<sub>r</sub>**  
 I(A) — Q(kVA<sub>r</sub>) — V<sub>rms</sub> —

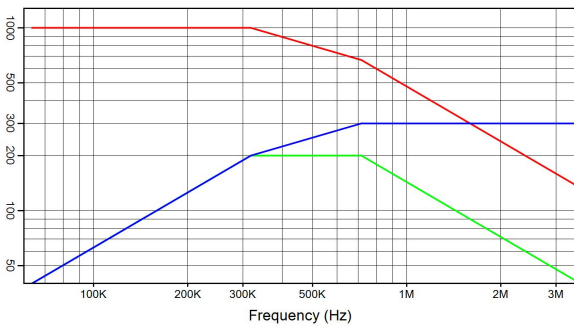


**CMPP 0.1  $\mu\text{F}$  1000 V<sub>rms</sub> 300 A<sub>rms</sub> 200 kVA<sub>r</sub>**  
 I(A) — Q(kVA<sub>r</sub>) — V<sub>rms</sub> —

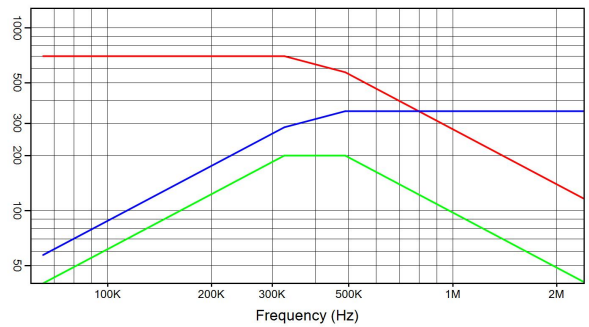

**CMPP 0.2  $\mu\text{F}$  700 V<sub>rms</sub> 350 A<sub>rms</sub> 200 kVA<sub>r</sub>**  
 I(A) — Q(kVA<sub>r</sub>) — V<sub>rms</sub> —

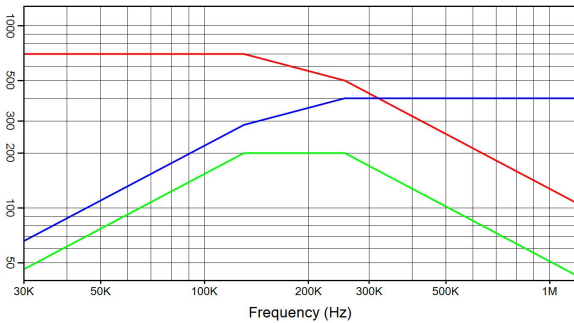

**CMPP 0.5  $\mu\text{F}$  700 V<sub>rms</sub> 400 A<sub>rms</sub> 200 kVA<sub>r</sub>**  
 I(A) — Q(kVA<sub>r</sub>) — V<sub>rms</sub> —

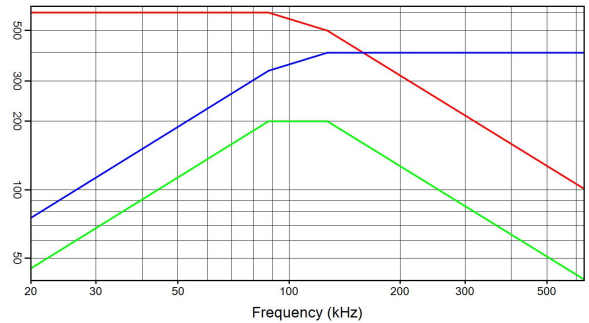

**CMPP 1  $\mu\text{F}$  600 V<sub>rms</sub> 400 A<sub>rms</sub> 200 kVA<sub>r</sub>**  
 I(A) — Q(kVA<sub>r</sub>) — V<sub>rms</sub> —